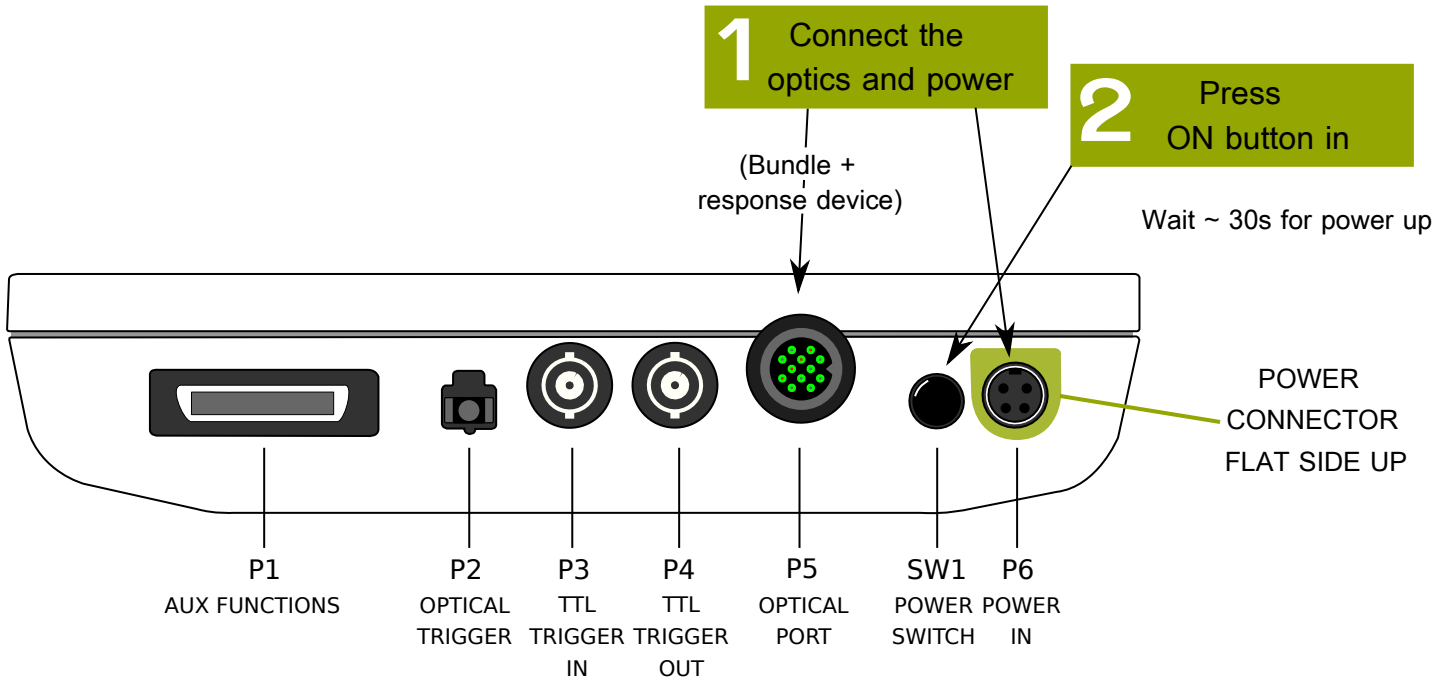# Birch Quick Start

Preparation: please be sure the Birch interface is well mounted before beginning.

**1** Connect the optics and power

(Bundle + response device)

**2** Press ON button in

Wait ~ 30s for power up

POWER CONNECTOR FLAT SIDE UP

| P1 | P2 | P3 | P4 | P5 | SW1 | P6 |
|----|----|----|----|----|-----|-----|
| AUX FUNCTIONS | OPTICAL TRIGGER | TTL TRIGGER IN | TTL TRIGGER OUT | OPTICAL PORT | POWER SWITCH | POWER IN |

**3** Tap here to select the response device

Use the "automatically" choice

**4** Tap here to choose an output mode

After #4 you should see responses here

Response Device

HHSC-2x4-C

Output mode

HID_KEY_12345

Responses

| B5 | B1 |
| B6 | B2 |
| B7 | B3 |
| B8 | B4 |

Log file: /mnt/td/20200527-193846

148.731001 2000900f
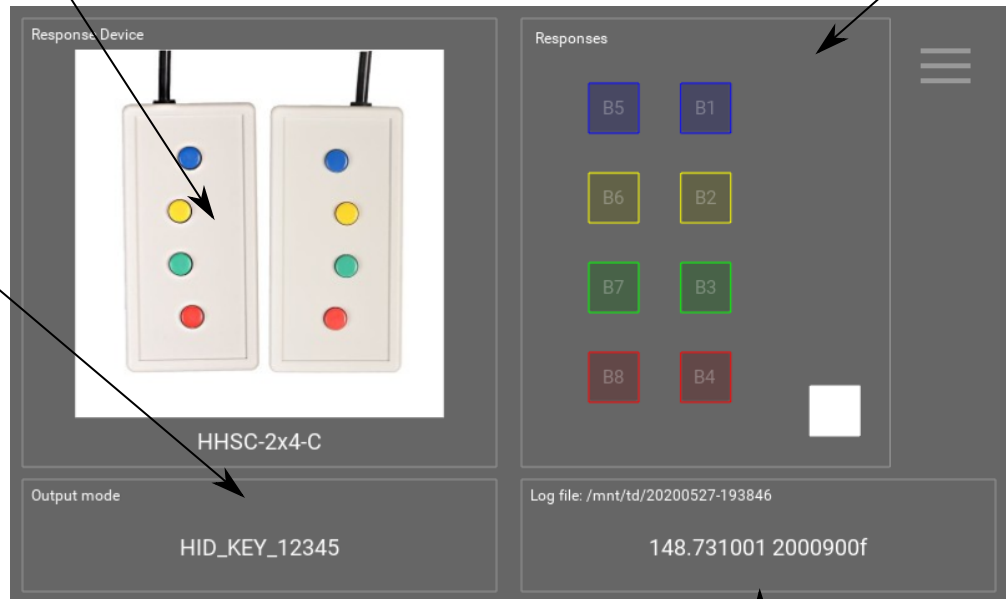
Event logging is disabled
until you attach a thumbdrive